



CAMLOCK
SYSTEMS

PRODUCT SPECIFICATION

Series 2 Locking Insert

SERIES 2

**ZINC ALLOY LOCKING INSERT
WITH OUR SERIES 2, RADIAL PIN
TUMBLER MECHANISM.**



OVERVIEW

Popular Seven-pin RPT Locking Insert

Our Series 2 Locking Insert utilises our seven pin, Radial Pin Tumbler mechanism and provides over 500,000 unique key combinations. The lock face is enhanced with an anti-drill centre.

Available in a standard 37mm and short 33mm (2M insert) body length and with a standard latch, flush latch or deadbolt.

Product features

- o Seven pin, radial pin tumbler mechanism
- o Additional anti-drill centre to enhance physical resistance
- o NAMA compliant and fits our range of vending T handles
- o Choose from a standard latch, flush latch or deadbolt
- o Available as a short-length insert (Series 2M insert)


TECHNICAL DATA

Number of key differs	500,000
Mechanism	Seven pin, Radial Pin Tumbler
Body material	Zinc alloy
Finish	Polished chrome
Latch options	Standard, flush or deadbolt
Patent protection	No
Key registration	No
Masterkeying	No
Key suite options	Keyed alike and keyed to differ
Body length	42mm
Insert diameter	19mm
Lock fixing	Body nut (supplied)

**SMARTER
LOCKING**



TECHNICAL DRAWINGS

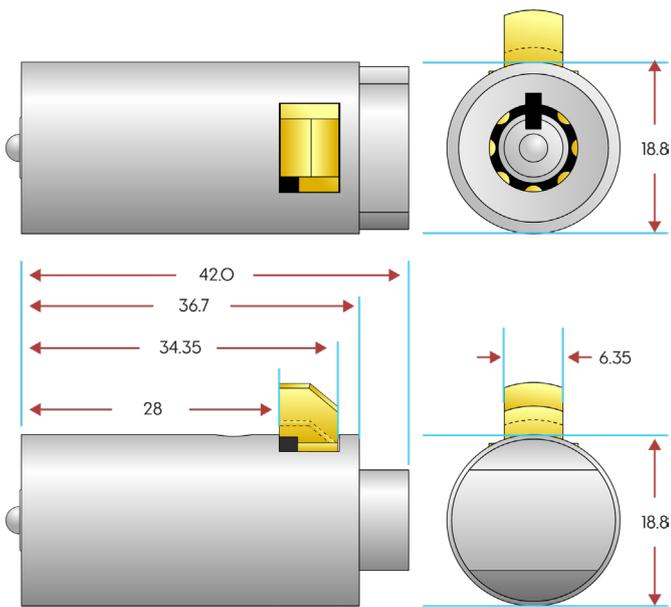

KEY MOVEMENT



Key movement: 1

Key starting position: 12 o'clock
Key rotation: 90°
Key ending position: 3 o'clock
Key when unlocked: Trapped

ADDITIONAL PRODUCT IMAGES

