



CAMLOCK
SYSTEMS

PRODUCT SPECIFICATION

Series 2 Locking Insert

SERIES 2

**ZINC ALLOY LOCKING INSERT
WITH OUR SERIES 2, RADIAL PIN
TUMBLER MECHANISM.**



OVERVIEW

Popular Seven-pin RPT Locking Insert

Our Series 2 Locking Insert utilises our seven pin, Radial Pin Tumbler mechanism and provides over 500,000 unique key combinations. The lock face is enhanced with an anti-drill centre.

Available in a standard 37mm and short 33mm (2M insert) body length and with a standard latch, flush latch or deadbolt.

Product features

- o Seven pin, radial pin tumbler mechanism
- o Additional anti-drill centre to enhance physical resistance
- o NAMA compliant and fits our range of vending T handles
- o Choose from a standard latch, flush latch or deadbolt
- o Available as a short-length insert (Series 2M insert)


TECHNICAL DATA

| | |
|-----------------------|---------------------------------|
| Number of key differs | 500,000 |
| Mechanism | Seven pin, Radial Pin Tumbler |
| Body material | Zinc alloy |
| Finish | Polished chrome |
| Latch options | Standard, flush or deadbolt |
| Patent protection | No |
| Key registration | No |
| Masterkeying | No |
| Key suite options | Keyed alike and keyed to differ |
| Body length | 42mm |
| Insert diameter | 19mm |
| Lock fixing | Body nut (supplied) |

**SMARTER
LOCKING**



TECHNICAL DRAWINGS

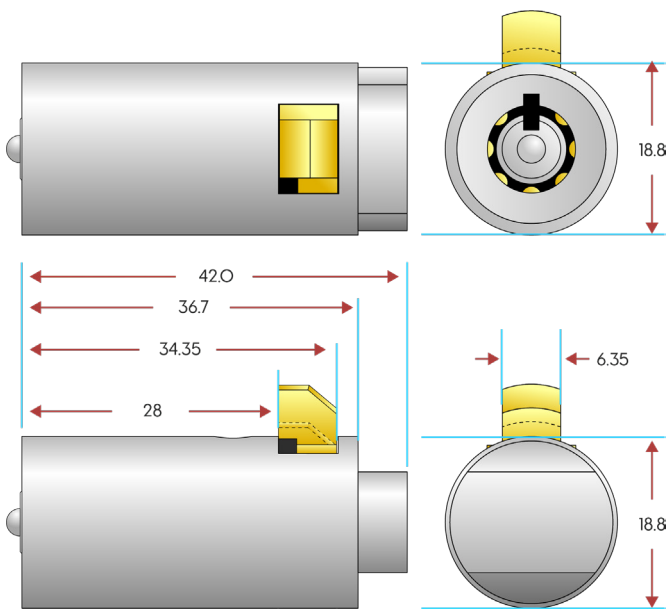

KEY MOVEMENT



Key movement: 1

Key starting position: 12 o'clock
Key rotation: 90°
Key ending position: 3 o'clock
Key when unlocked: Trapped

ADDITIONAL PRODUCT IMAGES

